

Guar Slurry

As a premier guar producer in India with two production facilities SHI is pleased to offer slurry based on 35-40 and 40-45, 4# gelling agent suspended in an environmental BTEX free mineral oil.


WGA is a self-hydrating guar slurry that provides rapid viscosity development for fracturing fluid applications.



Product	Spec	Temperature Range
WGA-3540S	4#	100-300°F
WGA-4045S	4#	100-300°F

ADVANTAGES

- BTEX free, low toxicity mineral oil that provides a stable slurry that is easy to handle for both continuous and batch mixing operations
- Rapid viscosity development enables continuous mixing on-site
- Highly dispersible, will not lump, and hydrates rapidly when added to fresh water, NaCl, or KCl
- Readily cross-linked with instant or delayed cross-linkers
- Stable at temperatures up to 300°F

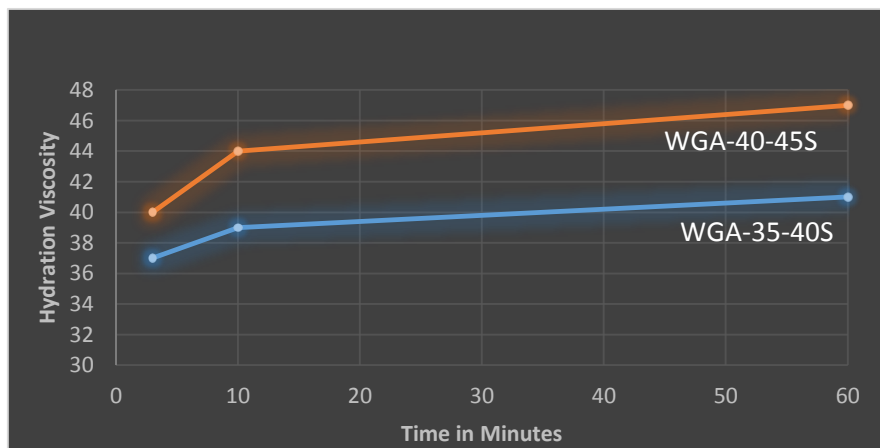

Sunita Hydrocolloids Inc.
1776 York Town Street, Suite 130
Houston, Texas 77056
Phone +1 832 581 2156
Website: www.shinc.us